


Alumaguard® All Weather Cool Wrap

Product Overview

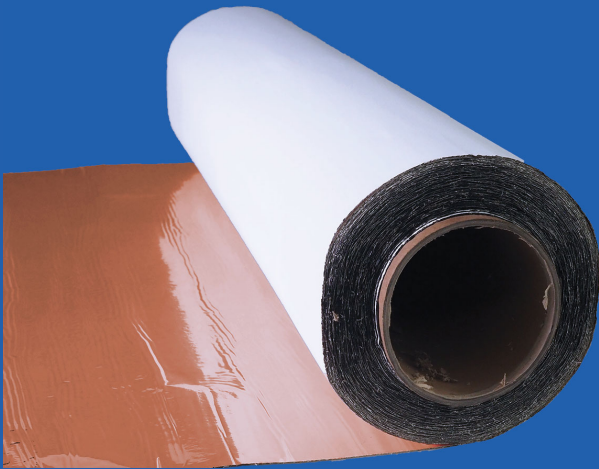

Alumaguard® All Weather Cool Wrap gives you all the benefits of Alumaguard All Weather but with the addition of a bright white finish, which meets California Title 24, CRRC and Energy Star requirements. This technology is a 'green' energy saving flexible cladding which includes a matte white finish. It qualifies for LEED credits, has an energy star rating, and it exceeds California Title 24 (emissivity & reflectivity). Alumaguard® All Weather weather-proofing cladding from Polyguard Products is the only flexible insulation cladding available in the market which combines the self-healing characteristics of rubberized asphalt with the ease of application and cold weather performance of acrylic adhesive-based products.

Alumaguard All Weather Cool Wrap is a composite membrane consisting of a matte white finish to which is applied a layer of rubberized asphalt specially formulated for use on insulated duct and piping applications. A metalized polyester film coated with a high quality low temperature acrylic adhesive is then applied to the rubberized asphalt. A heavy duty release liner gives it its peel and stick functionality. It is designed to be used outdoors to weather-proof exterior insulated ductwork, piping or other insulated tanks, vessels and equipment. It resists moisture, air and vapor intrusion.



**Zero Perm
(0.00 permeability)**



10-Year Warranty



**Bright white finish meets
Calif. Title 24, CRRC &
Energy Star requirements**



**Self-healing, puncture
resistant**



**Acrylic adhesive allows
installation down to
10°F**



**No pinning or activator
required**



Excellent emissivity



Can be used year round

Alumaguard® All-Weather Technical Properties and Testing

Membrane Property	Test Method	Results
Product Thickness (w/o liner)	Micrometer	34 mils 37 (Cool Wrap)
Product Weight	Scale	0.2 lbs/sf
Water Vapor Transmission (grains/hr-ft ²)	ASTM E96-00	.00
Permeance (US Perms)	ASTM E96-00	.00
Peel Adhesion (to primed steel)	ASTM D1000	>16 lbs/in
Tensile Strength (film only)	ASTM D882	35 lbs/in (MD) 45 lbs/in (XD)
Elongation (film only)	ASTM D882	18% (MD) 40% (XD)
Puncture Resistance (film only)	ASTM D1000	15 Lbf
Mold Resistance	ASTM C1338	Pass
Upper Temperature Limit	LAB	150°F
Emissivity	ASTM C1371	.030
Alumaguard® Cool Wrap Properties and Test Results	Solar Reflectance	Thermal Emittance
Cool Roof Rating Council(CRRC) Initial	0.86	0.82
Cool Roof Rating Council(CRRC) 3 Year	0.77	0.86
Energy Star 3 Year	0.84	0.78
California Title 24	Exceeds 0.75	Exceeds 0.75

contact us  

3801 S. IH-45
Ennis, TX 75119

Phone : 214-515-5000
Web : www.polyguard.com
Social : [@polyguardproducts](#)

