

RG-2400[®] LT SPRAY



Spray Equipment

Polyguard sprays **RG-2400 LT** without thinning the material – the following are the sprayer specifications of the equipment we own:

Graco 90:1 NXT Extreme pump assembly. We typically operate the spray unit at approximately 6,000-6,500 psi. The one we own has a 7 1/2 gallon Stainless Steel hopper with a heated recirculation unit. This is designed for cold weather applications. The hose is $50' \times 3/8''$, with a high pressure gun, tip, and fittings. The tip size is either a 5-19 or a 5-17. Purchased from Spray Quip in Houston. Spray tip can be chosen to fit your application.


- Air requirements 100 psi at 40 70 cfm
- o Power requirements- 110 power





P.O. Box 755 Ennis, TX 75120 PH: (214) 515-5000 FX: (972) 875-9425

Proud Member of
National Insulation
Association

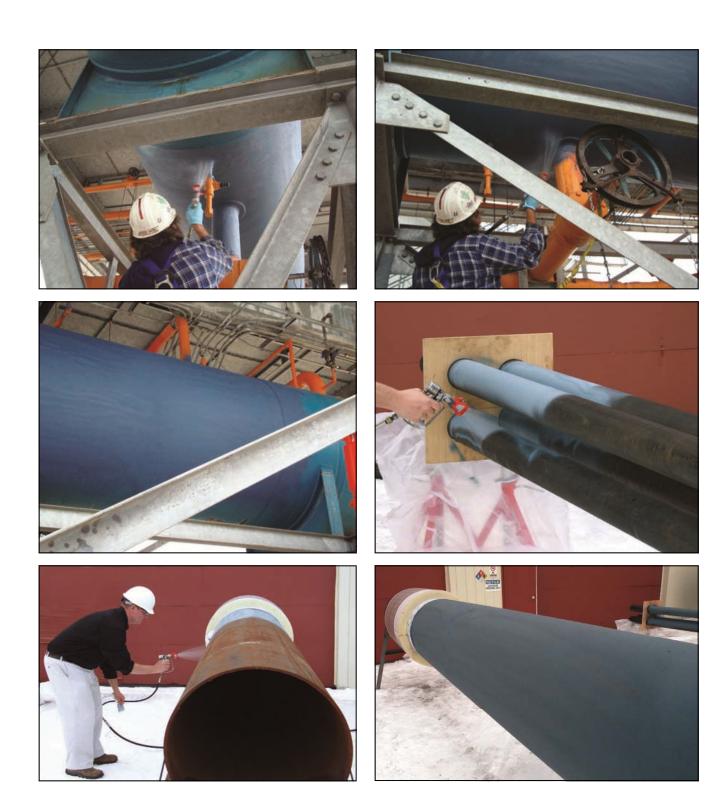

X:/PGP/Mktg/Lit/Mech/2019/RG2400 LT Spray.doc R. 6-11-19