

# WAX WRAP 60A/60U

Wax Wrap is a petroleum-based compound impregnated into a non-woven synthetic carrier that provides long lasting external corrosion protection for **Above-ground (60A) or Below-ground (60U)** metal substrates and infrastructure.

It easily conforms to irregular shaped profiles, sealing out moisture and can be applied over a wide range of temperatures and wet or dry surfaces with Superior Dielectric Strength to typical wax coating systems.



## CORROSION PROTECTION OF:

PIPELINES, FITTINGS, STREET TEES, FLANGES, VALVES, BOLTS, VAULTS BRIDGE CROSSINGS, TUNNELS AND IRREGULAR SHAPES & SPACES

**Wax Wrap** has been formulated to provide best in class corrosion protection on steel pipelines, valves and fittings without harsh smells. It stays pliable and flexible while absorbing minimal movement and vibrations of the substrate.

**Wax Wrap** is VOC free, NON-Hazmat and shows zero cathodic disbondment. These **Polyguard products** can be applied where water is present making it ideal for tunnel and vault applications.

**Wax Wrap** system has the pliability and adhesion you are looking for, even in extreme ambient temperatures and stays pliable in cold-weather. Upon completed application, projects can be backfilled and/or brought back to service immediately.

**Wax Wrap Systems** are successfully used on midstream oil and gas pipeline transmission lines, on water and wastewater transmission lines, in oil and gas production facilities, and more. **Manufactured in the USA.**

## WAX WRAP 60A (ABOVE-GROUND)

A 60 mil, petroleum-based compound impregnated into a non-woven synthetic carrier that provides long-term corrosion prevention.

### USE:

For application on above-ground metal structures, infrastructure and pipelines needing corrosion protection.

### PACKAGING:

SIZE	COVERAGE	OVERLAP
4"x9' rolls (24 Rolls/Case)	72 ft <sup>2</sup>	50% Overlap: 36 ft <sup>2</sup>
6"x9' rolls (16 Rolls/Case)	72 ft <sup>2</sup>	50% Overlap: 36 ft <sup>2</sup>
9"x18' rolls (6 Rolls/Case)	81 ft <sup>2</sup>	50% Overlap: 40 ft <sup>2</sup>
12"x18' rolls (4 Rolls/Case)	72 ft <sup>2</sup>	50% Overlap: 36 ft <sup>2</sup>

*\*other widths, lengths available*

### SPECIFICATIONS:

Color:	Grey
Thickness:	60 mils
Dielectric strength (ASTM D149):	404 volts/mil
MVR:	0.0045 g/h ft <sup>2</sup> Permeability Rate ASTM E96: 0.000509 perms avg.
Application Temperature:	40°F to 175°F
Operating Temperature:	-50°F to 175°F
Drop Melt Point (ASTM D127):	184°F
Flash Point:	525°F
Salts Test (ASTM B117):	No Visible Effect
UV Test (ASTM G53): Degradation	No Visible Material Degradation
Chemical Resistance (ASTM G20):	No Effect on Material

### ADVANTAGES:

- ✓ SP-2, only minimal surface prep required
- ✓ UV and Chemical Resistance
- ✓ Not affected by water, salts, acids or chemicals
- ✓ Odorless
- ✓ Superior in wet/humid environments
- ✓ No cure time, immediate backfill
- ✓ Nontoxic, no VOCs
- ✓ No Clay Fillers
- ✓ Easily conforms to irregular shaped surfaces
- ✓ Can be painted immediately, no wait time
- ✓ Meets and Complies with AWWA C217 Standard, NACE0375-2024



## WAX WRAP 60U (BELOW-GROUND)

A 60 mil, petroleum-based compound impregnated into a non-woven synthetic carrier that provides long-term corrosion prevention.

### USE:

For application on below-ground metal structures and pipelines needing corrosion protection.

### PACKAGING:

SIZE	COVERAGE	OVERLAP
4"x9' rolls (24 Rolls/Case)	72 ft <sup>2</sup>	50% Overlap: 36 ft <sup>2</sup>
6"x9' rolls (16 Rolls/Case)	72 ft <sup>2</sup>	50% Overlap: 36 ft <sup>2</sup>
9"x18' rolls (6 Rolls/Case)	81 ft <sup>2</sup>	50% Overlap: 40 ft <sup>2</sup>
12"x18' rolls (4 Rolls/Case)	72 ft <sup>2</sup>	50% Overlap: 36 ft <sup>2</sup>

*\*other widths, lengths available*

### SPECIFICATIONS:

**Color:** Brown

**Thickness:** 60 mils

**Dielectric strength (ASTM D149):** 296 volts/mil

**Cathodic Disbonding Resistance  
(ASTM G-8):** ZERO Disbondment

**MVR:** 0.0030 g/h ft<sup>2</sup> Permeability Rate  
ASTM E96: 0.00024 perms avg.

**Application Temperature:** -40°F to 175°F

**Operating Temperature:** -50°F to 175°F

**Drop Melt Point (ASTM D127):** 179°F

**Flash Point:** 538°F

### ADVANTAGES:

- ✓ SP-2, only minimal surface prep required
- ✓ Ideal when transitioning from old coating
- ✓ Superior in extreme environments
- ✓ No cure time, immediate backfill
- ✓ Nontoxic, no VOCs
- ✓ No Clay Fillers
- ✓ Easily conforms to irregular shaped surfaces
- ✓ CP Compatible
- ✓ Meets and Complies with AWWA C217 Standard, NACE0375-2024



## WAX WRAP PRIMER

Wax Wrap Primer is a formulation of petroleum based waxes, plasticizers, and moisture displacing corrosion inhibiting compounds.

### USE:

As a moisture displacement, surface conditioner for corrosion prevention on metal surfaces prior to application of Polyguard Wax Wrap.

### PACKAGING:

4 x 1 Gallon pails per case

### SPECIFICATIONS:

**Color:** Brown or White

**Coverage:** 1 gal / 100 ft<sup>2</sup>

**Flash Point:** 424°F


**Drop Melting Point:** 176°F

**Service Temp:** -40°F – 175°F

**High-Temp Available:** 250°F

### ADVANTAGES:

- ✓ Displaces moisture, can be applied under water on metal surfaces
- ✓ Easy to apply by hand or brush
- ✓ No curing time needed, no mixing required
- ✓ Environmentally safe, non toxic, no VOC's
- ✓ No clay fillers
- ✓ Excellent wetting properties
- ✓ No thinning in moist or humid environments
- ✓ Meets and Complies with AWWA C217-2023 Standard, NACE0375-2024

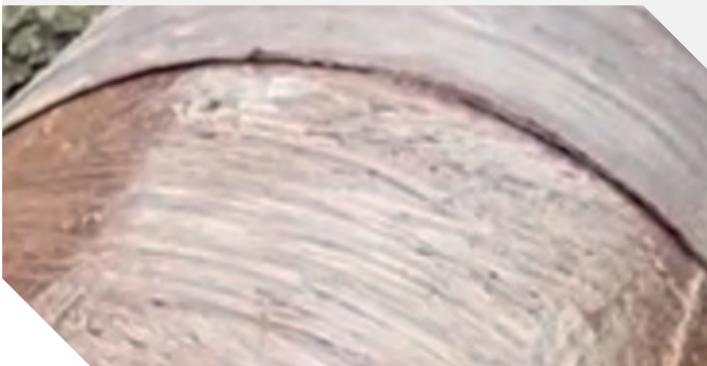

## PROFILE PUTTY

Petroleum based, anticorrosive filling compound, that molds and smooths the contours of irregular shapes, fittings and surfaces. Fills voids for an even application of Polyguard Wax Wrap each time.

### PACKAGING:

(1) 20 lb. block

**Coverage:** 462 cubic inches

### SPECIFICATIONS:

**Specific Gravity:** 1.11 (ASTM D70)

**Application Temp:** 40°F to 200°F

**Service Temp:** <200°F

**Flash Point:** 350°F

**Pour Point:** 240°F

### ADVANTAGES:

- ✓ No Fillers
- ✓ Min. surface preparation required, SP-2
- ✓ Creates smooth profile, fills voids
- ✓ No curing time, no pot life restrictions
- ✓ Environmentally safe, non toxic, no VOC's
- ✓ Will not dry out in heavy clay soils



# POLYGUARD WAX WRAP SYSTEM APPLICATION:

## 1 Surface Preparation\*

- Perform minimal surface prep (SP2).
- Remove loose scale, rust, paint, and any foreign material.

## 2 Apply Polyguard Wax Wrap Primer (1–3 mils)

- Apply by gloved hand or brush to all areas that will be wrapped.
- On wet, sweaty, cold, or rusty surfaces, firmly rub and press the primer to displace moisture and ensure adhesion.
- Extend the primer 3 inches beyond the area where the wrap will be applied for visual inspection.

## 3 Fill voids if needed (Profile Putty)

- Apply Polyguard anti-corrosive Profile Putty by pressing it into contours, minor pits, and voids to create a more even surface.
- Make sure the putty is adhering well as you work it into place.

## 4 Apply Polyguard Wax Wrap (60A/60U)

- Immediately wrap over the primer/putty.
- Start with a 100% overlap, then transition to a spiral wrap with at least a 1-inch overlap.
- (Some environments may require 50% overlap.)
- Press out all air pockets and smooth out the seams, especially on straight pipe.

## 5 Wrapping Irregular Shapes (flanges, fittings, tees, etc.)

- Leave slack in the wrap while applying it to ensure full coverage and allow it to contour to irregular shapes.
- After wrapping, smooth out all seams to ensure proper self-sealing
- Press and mold the wax-based tape so it conforms fully to the surface and does not bridge over irregular areas.

\*Surface Preparation: Prepare surface to SSPC-SP2, (Hand Tool), SSPC-SP1 (Solvent Cleaner) specifications. Using a wire brush, by hand, remove all the loose foreign material from the surface. Surfaces shall be clean and free of all dirt, rust, and all other foreign material prior to the application of the primer and wax wrap.