




BACKER ROD AND SEALANT FOR CONTINUOUS AIR BARRIER (BY OTHERS)

COMPRESSIBLE FOAM FILLER

BACKER ROD AND SEALANT (BY OTHERS)

NON-FLANGED WINDOW, DOOR, OR FIXTURE (WINDOW SHOWN)

CLOSE CAVITY AT JAMB WITH MASONRY

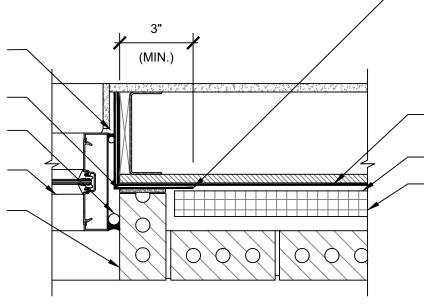

POLYGUARD AIRLOK SHEET 200 BU SERIES OR AIRLOK SHEET 400 SERIES APPLIED OVER POLYGUARD 650 LT LIQUID ADHESIVE OR CALIFORNIA SEALANT APPLIED AT A RATE OF 250 - 300 SF / GAL, OR OVER 650 WB LIQUID ADHESIVE APPLIED AT A RATE OF 350 - 400 SF / GAL; OR POLYGUARD DETAIL SEALANT PW APPLIED AND TOOLED TO MINIMUM 25 MILS WET. EXTEND SELECTED FLASHING A MINIMUM 3" ONTO EACH SURFACE. APPLY SELECTED FLASHING EITHER BEFORE OR AFTER (AS SHOWN) SELECTED POLYGUARD AIR BARRIER FIELD MEMBRANE.

POLYGUARD NON-PERMEABLE AIRLOK SHEET 400 SERIES AIR BARRIER FIELD MEMBRANE APPLIED BEFORE (AS SHOWN) OR AFTER SELECTED FLASHING

LOW-RISE SPRAY ADHESIVE (BY OTHERS)

RIGID INSULATION

04

PLAN @ FRAMED BACKING WALL / MASONRY VENEER - NON-FLANGED WINDOW, DOOR, OR FIXTURE JAMB

ASANP,

Polyguard Products, Inc. P.O. Box 755 - Ennis, TX 75120 Phone: 214-515-5000 Web Site - www.polyguard.com The information provided is based on data and knowledge considered to be true and accurate and is offered for the users' consideration, investigation and verification, but we do not warrant the results to be obtained. Please read all data sheets, statements, recommendations or suggestions in comjunction with our conditions of sale, withic about but all prodos sunclined by us

NOT TO SCALE
EFFECTIVE DATE:
03/06/2023
SUPERCEDES:

01/01/2023

©POLYGUARD PRODUCTS, INC. MATERIAL SEPARATED FOR CLARITY