

POLYGUARD FABRIC TAPE A MINIMUM 6" IN ALL DIRECTIONS PAST END LAP APPLIED TO CLEAN, DRY POLYGUARD CRM MEMBRANE PREPARED WITH POLYGUARD CR SEALANT AT A RATE OF 50 - 75 SF/GAL

WET SET POLYGUARD CRM MEMBRANE END LAP INTO POLYGUARD CR LIQUID MEMBRANE

POLYGUARD CR SEAM TAPE APPLIED TO FILM SIDE OF EXISTING PIECE OF POLYGUARD CRM MEMBRANE A MINIMUM OF 6" - LEAVE FILM ON UNTIL TIME FOR CONNECTION - REMOVE FILM AND LAY NEW PIECE ONTO POLYGUARD CR SEAM TAPE

4" SELVEDGE EDGE

3" MINIMUM 4" MAXIMUM END LAP


90 MILS OF POLYGUARD CR LIQUID MEMBRANE APPLIED EVENLY TO FABRIC SIDE OF POLYGUARD CRM MEMBRANE PREPARED WITH POLYGUARD CR SEALANT AT A RATE OF 50 - 75 SF/GAL

POLYGUARD CRM MEMBRANE APPLIED 6" ONTO POLYGUARD CR SEAM TAPE

POLYGUARD POLYFLOW 18 MOLDED SHEET DRAINAGE FABRIC TOWARD SUBSTRATE

POLYGUARD CR LIQUID MEMBRANE ENCAPSULATING THE EDGE OF THE POLYGUARD CRM MEMBRANE

POLYGUARD CRM MEMBRANE END LAP

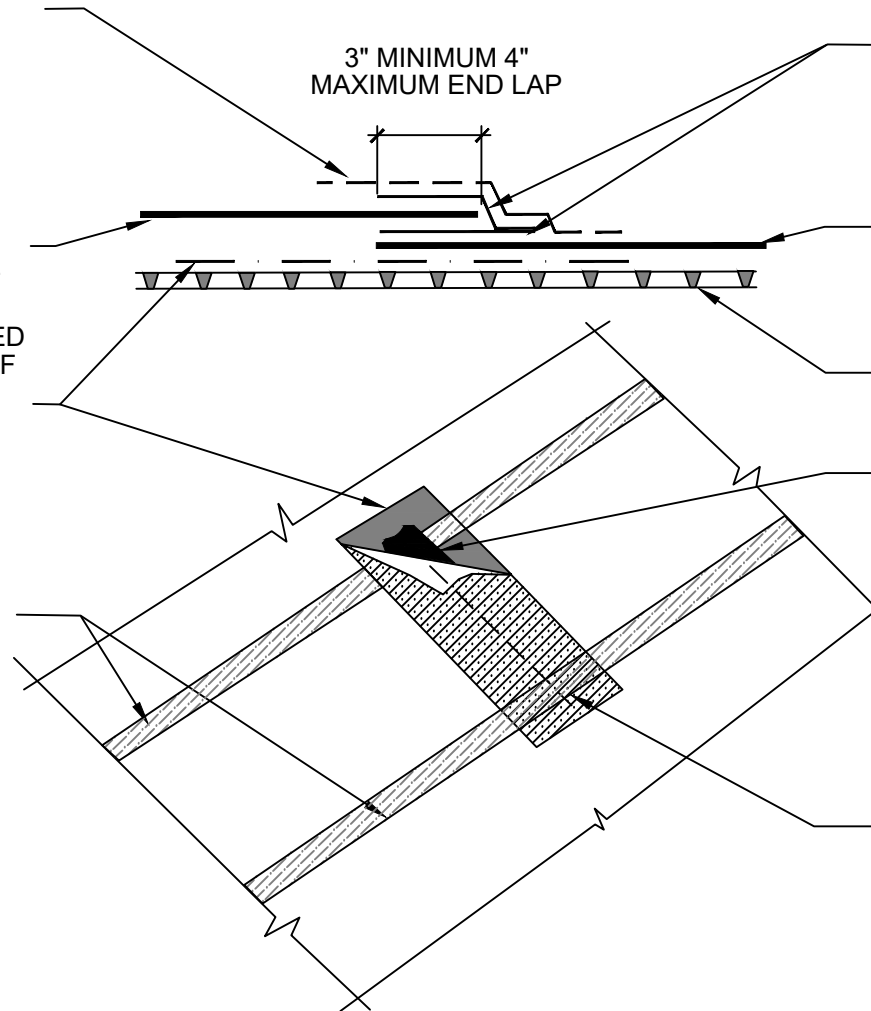

**CRH2** ISOMETRIC @ END LAP

<small>The information provided is based on data and knowledge considered to be true and accurate and is offered for the users' consideration, investigation and verification, but we do not warrant the results to be obtained. Please read all data sheets, statements, recommendations or suggestions in conjunction with our conditions of sale, which apply to all goods supplied by us.</small>	NOT TO SCALE
	EFFECTIVE DATE: 07/15/2024
	SUPERCEDES: 10/01/2022