




POLYGUARD POLYFLOW 15 SHEET MOLDED DRAIN WITH **FABRIC FACING SOIL**

POLYGUARD CRM FABRIC TOWARD CONCRETE POUR AND APPLIED OVER POLYGUARD 606 TAPE - PREPARE FABRIC OF POLYGUARD CRM MEMBRANE WITH POLYGUARD 650 LT LIQUID ADHESIVE OR POLYGUARD CALIFORNIA SEALANT AT A RATE OF 50 - 75 SF/GAL

MININUM 90 MIL THICKNESS OF POLYGUARD CR LIQUID MEMBRANE APPLIED TO POLYGUARD CRM MEMBRANE PREPARED WITH POLYGUARD CR SEALANT AT A RATE OF 175 - 200 SF/GAL - EXTENDED A MINIMUM OF 1/2" TO EACH SIDE OF THE **TERMINAL EDGE**

POLYGUARD POLYFLOW 18 MOLDED SHEET DRAINAGE FABRIC TOWARD SUBSTRATE

APPROVED SUBSTRATE - BY **OTHERS**

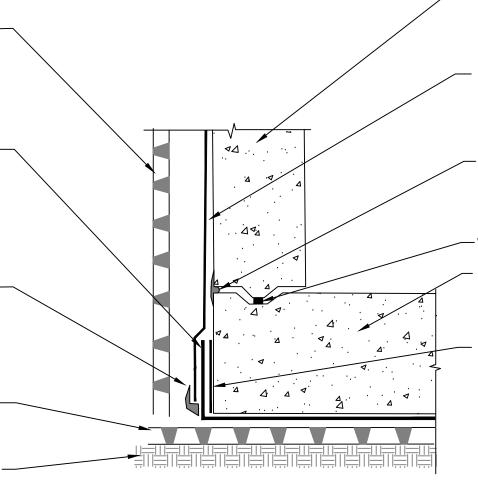

CONCRETE WALL - BY OTHERS

POLYGUARD ULTRA CRM MEMBRANE APPLIED TO CLEAN DRY AND FROST FREE CONCRETE PREPARED WITH POLYGUARD 650 LT LIQUID ADHESIVE OR POLYGUARD CALIFORNIA SEALANT APPLIED AT A RATE OF 250 - 300 SF/GAL

MINIMUM 90 MIL THICKNESS OF POYGUARD LM-95 EXTENDED A MINIMUM OF 2" TO EACH SIDE OF THE JOINT OR A 12" STRIP OF POLYGUARD DETAIL TAPE APPLIED TO PREPARED SUBSTRATE

WATERSTOP - BY OTHERS

CONCRETE SLAB - BY OTHERS

POLYGUARD 606 TAPE APPLIED TO SUBSTRATE PREPARED WITH POLYGUARD 650 LT LIQUID ADHESIVE OR POLYGUARD CALIFORNIA SEALANT AT A RATE OF 250 - 300 SF/GAL



Polyguard Products, Inc.

Phone: 214-515-5000

SECTION @ ULTRA CRM TIE IN TO POST TERMINATED CRM MEMBRANE - PROFILE 1

©POLYGUARD PRODUCTS, INC. MATERIAL SEPARATED FOR CLARITY

P.O. Box 755 - Ennis. TX 75120 Web Site - www.polyguard.com

NOT TO SCALE The information provided is based on data and knowledge considered to be EFFECTIVE DATE: true and accurate and is offered for the users' consideration, investigation and verification, but we do not warrant the results to be obtained. Please 10/01/2022 read all data sheets, statements, recommendations or suggestions in con-SUPERCEDES: junction with our conditions of sale, which apply to all goods supplied by us 02/04/2022