


## DETAIL

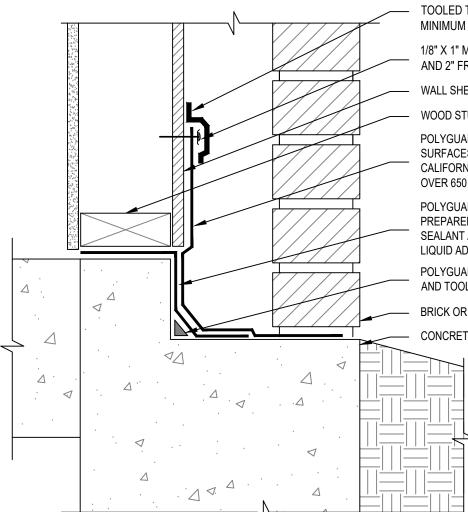

POLYGUARD DETAIL SEALANT PW OR TRM SEALANT APPLIED AND TOOLED TO MINIMUM 90 MILS OVER TERMINATION BAR; EXTEND MINIMUM 1/8" BEYOND PERIMETER OF EACH FASTENER HEAD

1/8" X 1" METAL TERMINATION BAR AND FASTENERS (BY OTHERS); FASTEN AT 8" O.C. AND 2" FROM EACH END; A TERMINATION BAR IS RECOMMENDED BY POLYGUARD

WALL SHEATHING

WOOD STUD SILL PLATE AND FRAMING

POLYGUARD TRM FLASHING APPLIED OVER CLEAN. DRY. FROST-FREE SURFACES PREPARED WITH POLYGUARD 650 LT LIQUID ADHESIVE OR CALIFORNIA SEALANT APPLIED AT A RATE OF 250 - 300 SF / GAL, OR OVER 650 WB LIQUID ADHESIVE APPLIED AT A RATE OF 350 - 400 SF / GAL

POLYGUARD TRM SILL APPLIED OVER CLEAN. DRY. FROST-FREE. RAW SILL PREPARED WITH POLYGUARD 650 LT LIQUID ADHESIVE OR CALIFORNIA SEALANT APPLIED AT A RATE OF 250 - 300 SF / GAL, OR OVER 650 WB LIQUID ADHESIVE APPLIED AT A RATE OF 350 - 400 SF / GAL

POLYGUARD DETAIL SEALANT PW APPLIED AND TOOLED TO MINIMUM 3/4" CANT / FILLET

BRICK OR MASONRY

CONCRETE FOUNDATION WALL

SECTION @ TRM FLASHING - INSTALLATION OVER TRM SILL IN CAVITY WALL FT4a

Polyguard Products, Inc. P.O. Box 755 - Ennis, TX 75120 Phone: 214-515-5000 Web Site - www.polyguard.com

GENERAL NOTE: IF ADHESIVE IS REQUIRED FOR SEAMS OR END LAPS, DO NOT USE POLYGUARD 650 WB LIQUID ADHESIVE.

## MATERIAL SEPARATED FOR CLARITY © POLYGUARD PRODUCTS. INC.

