




POLYGUARD UNDERSLAB MEMBRANE FABRIC TOWARD CONCRETE POUR

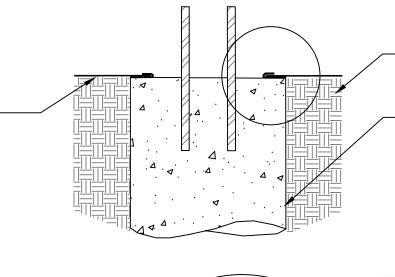


APPROVED SUBSTRATE

EXISTING CONCRETE PILE - BY OTHERS

MINIMUM 90 MILS OF POLYGUARD LM 95 APPLIED TO CLEAN DRY AND FROST FREE CONCRETE AND ENCAPSULATING THE EDGE AND ONTO A MINIMUM OF 1" OF THE FABRIC OF THE CLEAN, DRY POLYGUARD UNDERSLAB MEMBRANE FABRIC PREPARED WITH POLYGUARD 650 LT LIQUID ADHESIVE OR POLYGUARD CALIFORNIA SEALANT APPLIED AT A RATE OF 50 - 75 SF/GAL

POLYGUARD UNDERSLAB MEMBRANE APPLIED FABRIC TOWARD CONCRETE POUR WITH END ONTO A MINIMUM OF 2" OF CONCRETE AND WET LM-95



US4 )

SECTION @ PILE TERMINATION - PROFILE 2

©POLYGUARD PRODUCTS, INC. MATERIAL SEPARATED FOR CLARITY

Polyguard Products, Inc. P.O. Box 755 - Ennis, TX 75120 Phone: 214-515-5000 Web Site - www.polyguard.com The information provided is based on data and knowledge considered to be true and accurate and is offered for the users' consideration, investigation and verification, but we do not warrant the results to be obtained. Please read all data sheets, statements, recommendations or suggestions in conjunction with our conditions of sale, which apply to all goods supplied by use

NOT TO SCALE

EFFECTIVE DATE:
07/15/2024

SUPERCEDES:

SUPERCEDES: 10/01/2022