




**DECK DRAIN - BY OTHERS** 

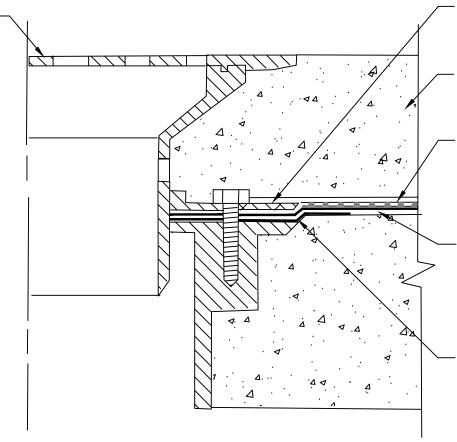

**CLAMPING RING - BY OTHERS** 

**CONCRETE TOPPING - BY OTHERS** 

POLYGUARD POLYFLOW 18 SHEET MOLDED DRAIN MESH FACING TOPPING SLAB

POLYGUARD 650 MEMBRANE APPLIED TO SUBSTRATE PREPARED WITH POLYGUARD 650 LT LIQUID ADHESIVE OR POLYGUARD CALIFORNIA SEALANT AT A RATE OF 250 - 300 SF/GAL OR POLYGUARD 650 WB LIQUID ADHESIVE AT A RATE OF 350 - 400 SF/GAL

90 MILS MINIMUM OF POLYGUARD DETAIL SEALANT PW OR POLYGUARD LM-95 APPLIED A MINIMUM OF 6" AROUND DRAIN FLANGE



SECTION @ DUAL LEVEL DRAIN

Polyguard Products, Inc. P.O. Box 755 - Ennis, TX 75120 Phone: 214-515-5000 Web Site - www.polyguard.com

SPECIAL NOTE: IF ADHESIVE IS REQUIRED FOR SEAMS OR ENDLAPS DO NOT USE POLYGUARD 650 WB LIQUID ADHESIVE ©POLYGUARD PRODUCTS, INC. MATERIAL SEPARATED FOR CLARITY

The information provided is based on data and knowledge considered to be true and accurate and is offered for the users' consideration, investigation and verification, but we do not warrant the results to be obtained. Please read all data sheets, statements, recommendations or suggestions in conjunction with our conditions of sale, which apply to all goods supplied by us.

NOT TO SCALE

EFFECTIVE DATE:
07/15/2024

SUPERCEDES: 10/01/2022