


DETAIL

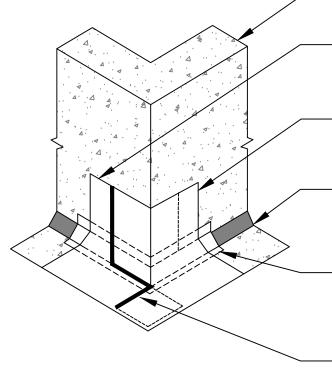

— CONCRETE SUBSTRATE

POLYGUARD 650 TRM PIECE #1 CUT AND FIT TO OUTSIDE CORNER; APPLY OVER SUBSTRATES PREPARED WITH POLYGUARD 650 LT LIQUID ADHESIVE OR CALIFORNIA SEALANT APPLIED AT A RATE OF 250 - 300 SF / GAL, OR OVER 650 WB LIQUID ADHESIVE APPLIED AT A RATE OF 350 - 400 SF / GAL

POLYGUARD 650 TRM PIECE #2 CUT AND FIT TO OUTSIDE CORNER; APPLY OVER SUBSTRATES PREPARED WITH POLYGUARD 650 LT LIQUID ADHESIVE OR CALIFORNIA SEALANT APPLIED AT A RATE OF 250 - 300 SF / GAL, OR OVER 650 WB LIQUID ADHESIVE APPLIED AT A RATE OF 350 - 400 SF / GAL

POLYGUARD LM-95, DETAIL SEALANT PW, OR TRM SEALANT APPLIED AND TOOLED TO 3/4" FILLET / CANT ON INSIDE CORNERS VERTICALLY AND HORIZONTALLY TO RAW CONCRETE; ALLOW TO CURE FOR MINIMUM 2 HOURS PRIOR TO SHEET APPLICATION

POLYGUARD TRM FLASHING 12" STRIP APPLIED TO INSIDE AND OUTSIDE CORNERS - PREPARE SUBSTRATES WITH POLYGUARD 650 LT LIQUID ADHESIVE OR CALIFORNIA SEALANT APPLIED AT A RATE OF 250 - 300 SF / GAL, OR OVER 650 WB LIQUID ADHESIVE APPLIED AT A RATE OF 350 - 400 SF / GAL

POLYGUARD LM-95, DETAIL SEALANT PW, OR TRM SEALANT APPLIED AND TOOLED TO MINIMUM 90 MILS OVER 650 MEMBRANE CUT EDGE AND TERMINATIONS AS EDGE SEAL



Polyguard Products, Inc. P.O. Box 755 - Ennis, TX 75120 Phone: 214-515-5000 Web Site - www.polyguard.com

<u>GENERAL NOTE:</u> IF ADHESIVE IS REQUIRED FOR SEAMS OR END LAPS, DO NOT USE POLYGUARD 650 WB LIQUID ADHESIVE.

MATERIAL SEPARATED FOR CLARITY © POLYGUARD PRODUCTS, INC.

The information provided is based on data and knowledge considered to be true and accurate and is offered for the users' consideration, investigation and verification, but we do not warrant the results to be obtained. Please and all data sheets, statements, recommendations or suggestions in conjunction with our conditions of sale, which apply to all goods supplied by us