


TERM UV Flashing Moisture | Termite Barrier







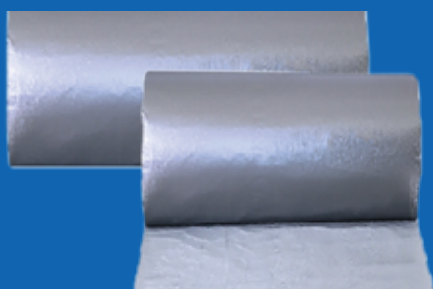

Product Overview



TERM UV Flashing | Termite Barrier is applied where the horizontal concrete slab intersects with exterior sheathing. This area is a frequent entry point for termites which have come up on the outside of the foundation wall. TERM Flashing | Termite Barrier UV has 12 months UV resistance and meets NFPA 285 fire resistance. TERM UV Flashing accepts any sealant, caulking or paint.

TERM UV Flashing | Termite Barrier is a flexible membrane which will keep air/moisture and all pests excluded, when properly constructed as part of the building envelope, acts as a barrier to all insects.



- 
Strong, pliable, self-adhesive sheet flashing with special silver foil facing.
- 
4-mil high density polyethylene film bonded to 36 mils of sealant = 40 mils thick.
- 
Formulated for low temperature application down to 30°F (-1°C).
- 
For flashing application, available roll widths are 12" & 18".
- 
All rolls are 75' long
- 
NFPA 285 rated
- 
The only physical termite barrier with 23 years of university testing. TERM has been evaluated by the ICC (International Code Council) against their AC 380 standard Acceptance Criteria for Termite Physical Barrier Systems.
- 
1 year UV exposure.

Property	Test Method	Results (English)	Results (Metric)
Color	--	Silver	<i>Silver</i>
Barrier Thickness	ASTM D 1000 inch (mm)	0.040	<i>0.04</i>
Long Term Testing against Termite Penetration	ICC AC380 Acceptance Criteria for Termite Physical Barrier Systems	100% effective	<i>100% effective</i>
Elongation of Barrier Sealant – Percent Stretch Before Failure	ASTM D 412	> 1000%	<i>> 1000%</i>
Pesticide Repellency (<i>Chlordane, fipronil, permethrin</i>)	ASTM F 2130	0%	<i>0%</i>
Evaluation of Fire Propagation of Building Materials	NFPA 285	Compliant	<i>Compliant</i>

Packaging / Coverage Rates

PRODUCT	UNIT OF MEASURE	APPROXIMATE COVERAGE	LB/UNIT	PALLETIZATION
TERM UV Flashing Moisture Termite Barrier 12" x 75' (.305 m x 22.86 m) 18" x 75' (.457 m x 22.86 m)	Rolls Per Carton	LF Per Carton		
	3	225	75	30 cartons
	2	150		
Polyguard 650 LT Liquid Adhesive	5-Gal Pail <i>or</i>	250 – 350 ft ² /gallon	45 lb.	36 Pails
	4-1-Gal Pail		31 lb.	54 Cartons
Polyguard 650 WB Water Base Liquid Adhesive	5-Gal Pail <i>or</i>	250 – 350 ft ² /gallon	50 lb.	36 Pails
	4-1-Gal Pail		37 lb.	54 Cartons
Polyguard 650 Mastic	5-Gal Pail <i>or</i>	1" bead 100 LF/gallon	48 lb.	36 Pails
	Ctn of 12-30 oz. tubes	1/2" bead 65 LF/tube		25 Cartons

contact us



3801 S. IH-45
Ennis, TX 75119

Phone: 214-515-5000

Web: www.polyguard.com

Social: @polyguardproducts

