



# BB LF - Blue Barrier Liquid Flashing


## PRODUCT OVERVIEW

BB LF (Blue Barrier™ Liquid Flashing) is a part of Polyguard's Residential family of products and is an all-purpose, fluid-applied flashing installed with an application gun and trowel used to create a weather resistant, fully adhered air barrier system around window and door installations. It was developed utilizing Silyl Terminated Polyether Technology (STPE). It comes in a 20oz "sausage tube" requiring a "sausage gun" to apply. Can be left exposed to UV light for up to 9 months.

- High viscosity: supports gun and spread applications
- Easy to use trowel application
- No mixing needed, no primer required
- Exceptional durability prevents flashing wear and tear
- Superior adhesion to concrete, metal, CMU block, untreated OSB or plywood sheathings, gypsum, ICF
- Permeable: Allows substrates to breathe
- Exceptional adhesion: bonds to multiple substrates in either wet or dry conditions
- Environmentally friendly: Solvent free, isocyanate free and low VOC

Typical Properties - Cured Properties at 21 Days	
NFPA 285	Compliant under many wall assemblies
Hardness, Shore A	55-65
Tensile Strength	300-350 psi
Elongation	200-250%
Tear Strength	40-50 psi
Peel Strength	25LPI
Perm Rating	6-8 Perms
Solids Content	100%
UV Exposure	9 months
Tack Free Time	<45 minutes
Cure Rate	1/8" - 16 hrs.
VOC Content	<20 g/l

### COMPANION PRODUCTS

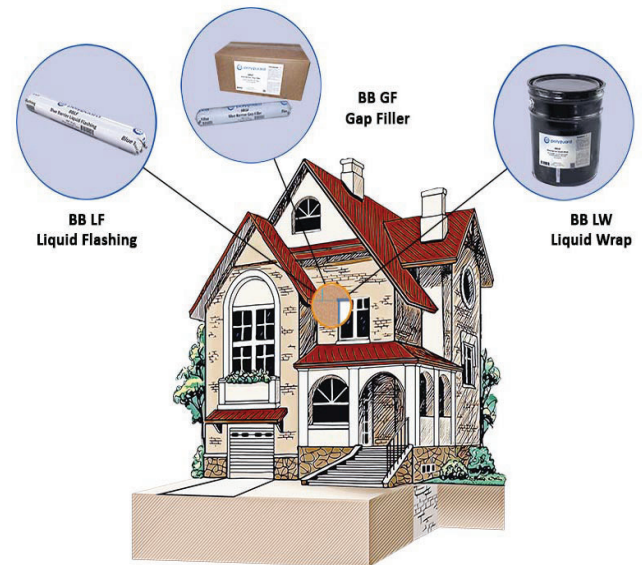

REV053024