



# Blue Barrier 2300


## PRODUCT OVERVIEW

Blue Barrier™ Liquid Wrap 2300 is a low VOC spray applied, fully adhered, permeable, air and moisture building envelope protection membrane. This thin mil, seamless substrate coating can be applied with an approved airless sprayer or power rolled. Liquid Wrap can be sprayed over clean and debris free surfaces and substrates such as OSB, plywood or exterior gypsum.

- Superior substitute for traditional housewraps
- Exceptional adhesion, bonds to multiple substrates (OSB, plywood, gypsum, CMU)
- Permeable; allows substrates to breathe
- Damp surface application, bonds and cures in damp conditions
- Stands up to UV for up to 9 months of UV Exposure
- Damp surface application, bonds and cures in damp conditions
- Can be covered with commonly used cladding/siding systems including heavy veneers
- When utilized with our Blue Barrier 2200 Joint Filler combines to fill in voids up to 3/4" due to penetrations or dissimilar surfaces
- Coverage rate of 300 – 400 sq ft at 20 wet mil thickness / 5 gallon pail

| Typical Properties - Cured Properties at 21 Days |                                      |
|--|--------------------------------------|
| NFPA 285   | Compliant under many wall assemblies |
| Hardness, Shore A                                | 40-45                                |
| Tensile Strength                                 | 90-100 psi                           |
| Elongation                                       | 225-300%                             |
| Tear Strength                                    | 50-60 psi                            |
| Perm Rating                                      | 15 perms                             |
| Solids Content                                   | 90% solids                           |
| UV Exposure                                      | 6 months                             |
| Uncured Properties                               |                                      |
| Tack Free Time                                   | <60 minutes                          |
| Cure Rate  | 1/8" - 16 hrs.                       |
| VOC Content                                      | <20 g/l                              |

### COMPANION PRODUCTS

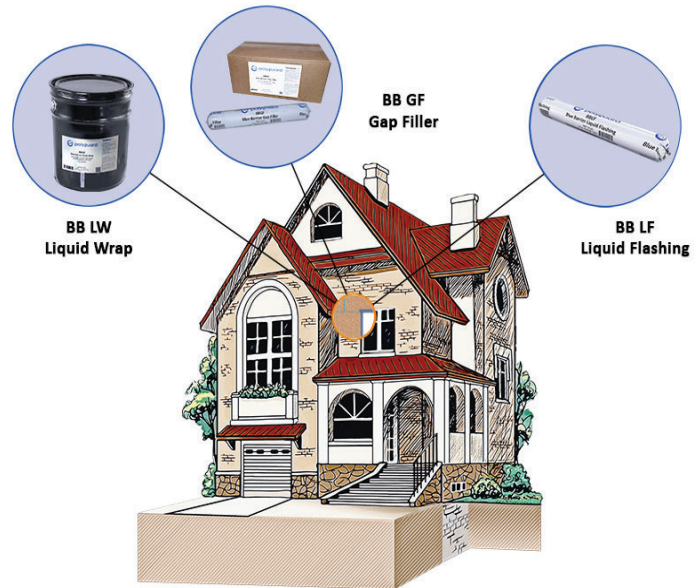

REV1021324