

# Home Stretch Detail Tape

## Product Overview



Home Stretch™ Detail Tape is a strong, pliable, self-adhesive sheet consisting of a cross-laminated, high-density polyethylene (HDPE) backing bonded to a rubberized asphalt compound. Poly Wall® Home Stretch™ Detail Tape is used to fabricate inside and outside corners, seal penetrations, control joints, cold joints and to patch damaged areas of Home Stretch™ Waterproofing Membrane. Home Stretch™ Detail Tape is available in easy to handle and install 12" wide by 66.7' long rolls with a disposable treated release liner. Click the link below for the full list of companion products used in conjunction with Home Stretch Detail Tape, to complete the system.



12" x 66.7' rolls for detailing



Factory controlled 40-mil uniform and consistent thickness



Side lap design delivers increased water tightness



Extended selvage edge provides asphalt-to-asphalt adhesion at the seam



Appropriate for use with both Expanded and Extruded Polystyrene ICF Systems



High tensile strength with terrific flexibility




No VOCs, no odor



Release film does not tear easily and protects adhesive layer

| Property  | Test Method   | Typical Value      |
|---|---|--------------------|
| Membrane Thickness                                  | ASTM D 1000   | 40 mils            |
| Tensile Strength - Membrane                         | ASTM D 412 Modified Die C                             | 370 PSI            |
| Elongation - Ultimate Failure of Rubberized Asphalt | ASTM D 412  | 600%               |
| Tensile Strength - Film                             | ASTM D 882  | 7294 PSI           |
| Permeance   | ASTM D E 96 Method B                                  | 0.022 Perms        |
| Crack Cycling                                       | ASTM C 836 Test @ 15°F (-26°C)                        | No effect          |
| Peel Adhesion                                       | ASTM D 903  | 17 lbs./in. width  |
| Lap Peel Adhesion                                   | ASTM D 1876   | 8.0 lbs./in. width |
| Low Temperature Flexibility (-15°F)                 | ASTM D 1970 Modified                                  | Pass               |
| Pliability  | ASTM D 146 180° bend over 1" mandrel at -25°F (-32°C) | No effect          |
| Puncture Resistance - Membrane                      | ASTM E 154  | 69 lbs.            |
| Resistance to Hydrostatic Head                      | ASTM D 5385   | >231 ft.           |
| Exposure to Fungi in Soil                           | GSA-PBS 07115 (16 weeks)                              | No effect          |
| Water Absorption                                    | ASTM D 570  | 0.1%               |

## Companion Products

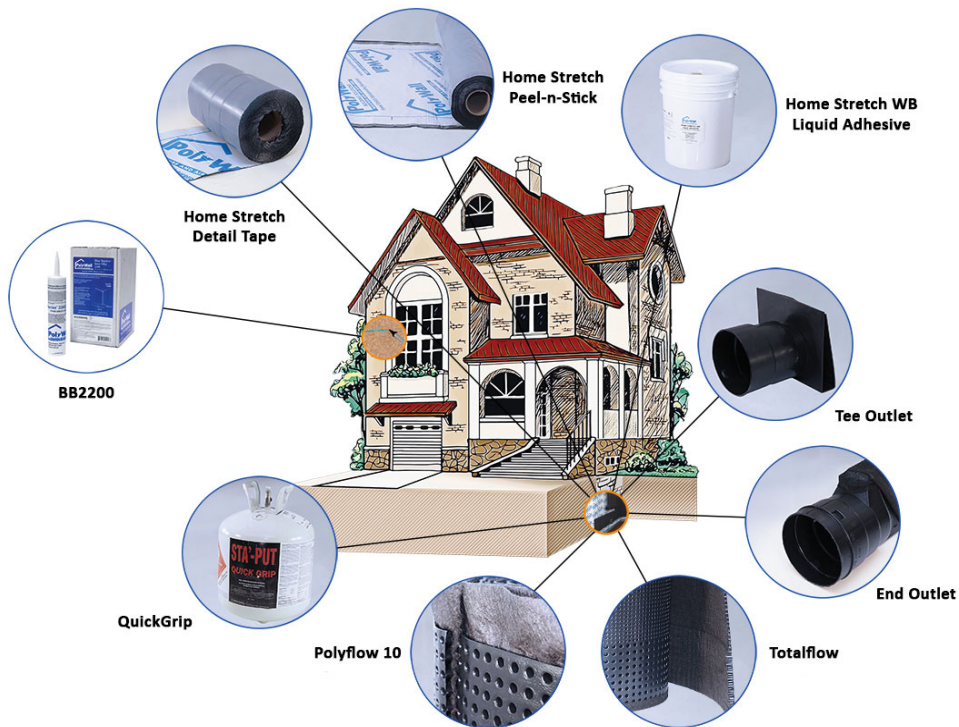

## contact us



3801 S. IH-45  
Ennis, TX 75119

Phone : 214-515-5000

Web : [www.polyguard.com](http://www.polyguard.com)

Social : @polyguardproducts

