

Home Stretch Peel 'N Stick Membrane

Product Overview



Home Stretch™ Peel 'N Stick membrane is specifically designed and engineered for use with Insulated Concrete Forms (ICF) technology. It is also an excellent choice for waterproofing poured concrete foundation walls, Concrete Masonry Unit (CMU) walls, and related applications where waterproofing is critical or hydrostatic pressure is present. Home Stretch™ is a 40 mil thick, self-adhering sheet waterproofing membrane. It consists of a strong pliable high density polyethylene (HDPE) facing bonded to a rubberized asphalt waterproofing compound, a technology that has been proven effective over many years of use. Home Stretch™ is available in easy to handle and install 36" wide by 66.7' long rolls (200 sf / roll) with a disposable treated release liner. Click the link below for the full list of companion products used in conjunction with Home Stretch, to complete the system.



36" x 66.7' rolls



Factory controlled 40-mil uniform and consistent thickness



Side lap design delivers increased water tightness



Extended selvage edge provides asphalt-to-asphalt adhesion at the seam



Appropriate for use with both Expanded and Extruded Polystyrene ICF Systems



High Tensile Strength with terrific flexibility




No VOCs, No odor



Release film does not tear easily and protects adhesive layer

Property	Test Method	Typical Value
Thickness		40 mils
Application Temperature		25°F and above
Elongation	ASTM D412	300%
Tensile Strength (Membrane)	ASTM D412 - Modified	325 psi
Tensile Strength (Film)	ASTM D882	3900 psi (26.9 Mps)
Peel Strength	ASTM D903	9 lbs/in (1576 N/m)
Minimum Puncture Resistance - Membrane	ASTM E154	50 lbs.
Flexibility at -22°F	ASTM D1970	Pass
Water Vapor Transmission	ASTM E96	0.02 Perms (1.14 ng/Pa.s.m2)
Lap Peel Strength @ 41°F	ASTM D1876	3.3 lbf/in (580N/m)
Hydrostatic Head	ASTM D5385	231 feet (60 m of water)
Moisture Absorption	ASTM D570-81	0.1% maximum

Companion Products

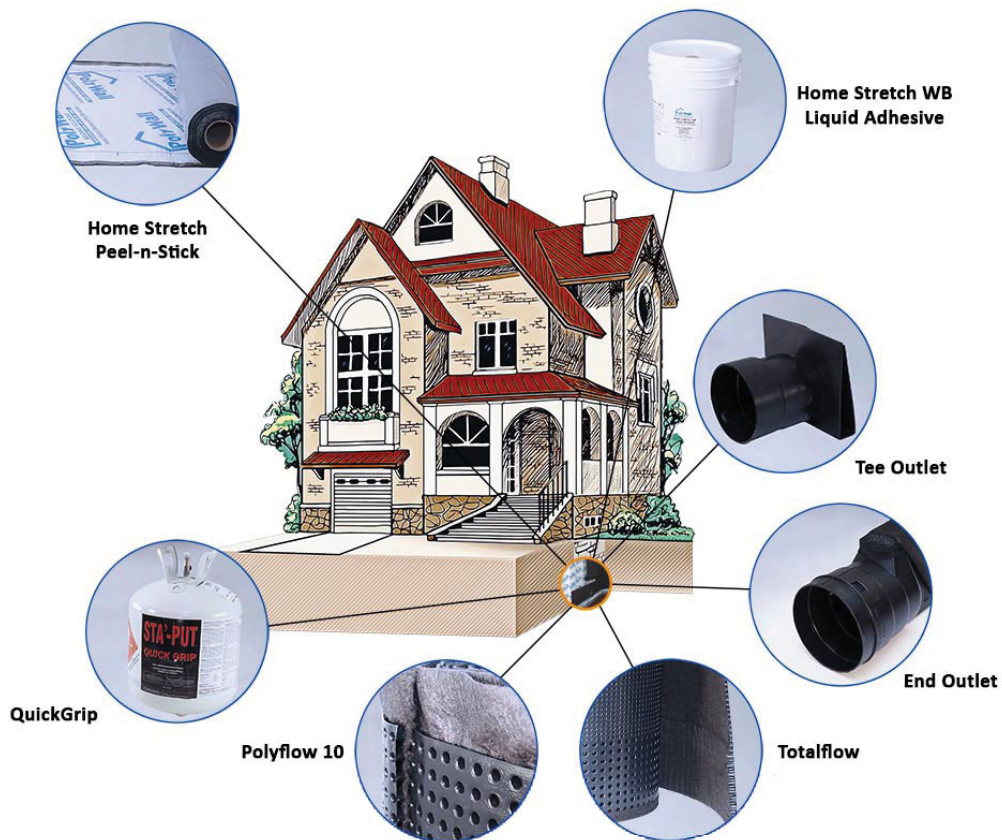

contact us



3801 S. IH-45
Ennis, TX 75119

Phone : 214-515-5000
Web : www.polyguard.com
Social : @polyguardproducts

