




GENERAL NOTE: TEXT IN IMAGES 3 & 4 TEACH UNDERSLAB FABRIC BARRIER APPLICATION PRINCIPLES OF DIMENSIONING AND SURFACE PREPARATION. APPLY SAID PRINCIPLES TO FIELD VARIANCES.

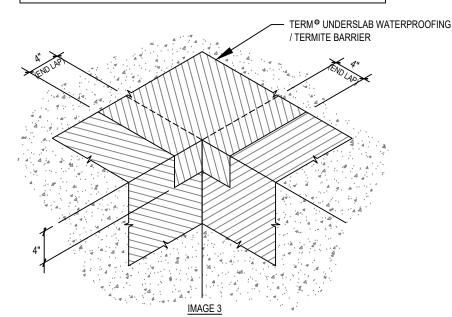

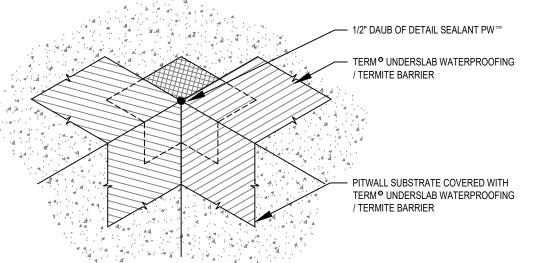



-12" WIDE TERM O UNDERSLAB FABRIC BARRIER
CENTERED AND APPLIED OVER OPEN AND
INTERSECTING ENDS OF TERM OUNDERSLAB
WATERPROOFING / TERMITE BARRIER. COAT
FABRIC SIDE OF TERM UNDERSLAB
WATERPROOFING / TERMITE BARRIER AND
TERM OUNDERSLAB FABRIC BARRIER
OVERLAY WITH 650 LT LIQUID ADHESIVE
APPLIED AT A RATE OF 100-150 SF/GAL



## TERM<sup>©</sup> UNDERSLAB WATERPROOFING / TERMITE BARRIER PREFORMED CORNER AT A PIT TOP

©POLYGUARD PRODUCTS, INC.

P.O. Box 755 - Ennis, TX 75120

Phone: 214-515-5000 Fax: 972-875-9425

Web Site - www.polyguardbarriers.com



The information provided is based on data and knowledge considered to be true and accurate and is offered for the users' consideration, investigation, and verification; but we do not warrant the results to be achieved. Please read all data sheets, statements, suggestions, or recommendations in conjunction with our conditions of sale, which apply to all goods supplied by us.

DRAWING SCALE: NOT TO SCALE EFFECTIVE DATE: 03/01/2018 SUPERCEDES: 06/21/2017