

APPLY POLYGUARD 650 LT OR 650 WB LIQUID ADHESIVE TO PREPARE SUBSTRATE PRIOR TO APPLYING POLYGUARD TERM SELF-ADHERING BARRIER MEMBRANES

POLYGUARD POLYFLOW 18 PERIMETER DRAINAGE BOARD

POLYGUARD TERM FLASHING BARRIER 12" STRIP, APPLIED TO CORNER OVER PREPARED SUBSTRATE

POLYGUARD TERM WATERPROOFING / TERMITE BARRIER, APPLIED TO SUBSTRATE WITH 650 LT LIQUID ADHESIVE, CALIFORNIA SEALANT, OR 650 WB LIQUID ADHESIVE


POLYGUARD POLYFLOW 15 PERIMETER DRAINAGE AND PROTECTION BOARD

POLYGUARD TERM 606 DOUBLE SIDED TAPE DETAILING BARRIER, MINIMUM 4" WIDTH

1'-0" (MINIMUM)
6" (MINIMUM)
POLYGUARD TOTAL FLOW PERIMETER DRAINAGE
SOIL
POLYGUARD DETAIL SEALANT
WATERSTOP, TYPICAL

POLYGUARD TERM WATERPROOFING / TERMITE UNDERSLAB BARRIER, APPLIED UNDER TUNNEL AND UP THE WALLS A MINIMUM 12"

POLYGUARD POLYFLOW 18 DRAINAGE BOARD

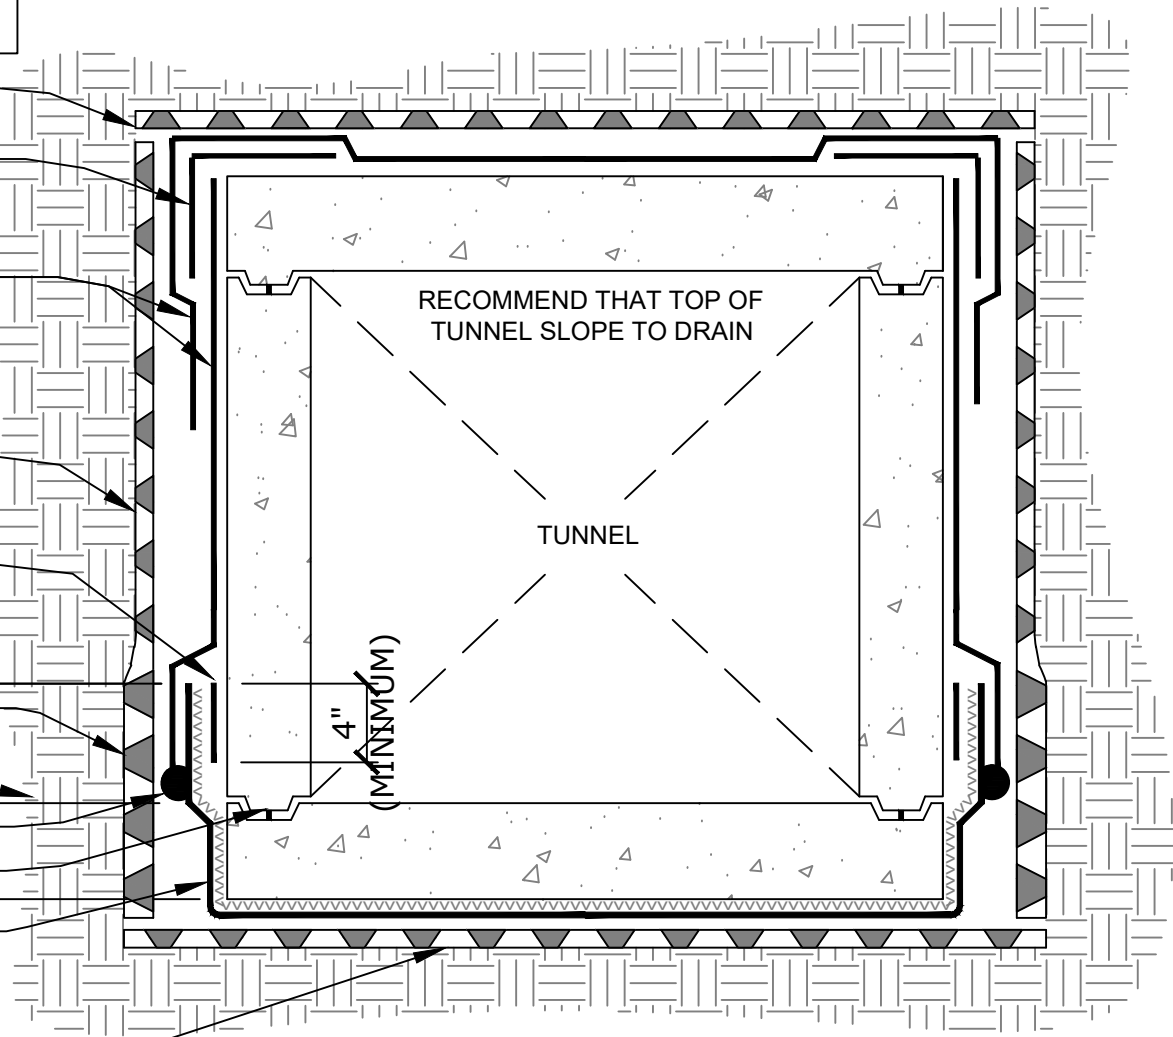

TV7

SECTION @ TERM[®] WATERPROOFING / TERMITE BARRIER TUNNEL DETAILING

©POLYGUARD PRODUCTS, INC.

P.O. Box 755 - Ennis, TX 75120
Phone: 214-515-5000 Fax: 972-875-9425
Web Site - www.polyguardbarriers.com



polyguard
TERM BARRIER

The information provided is based on data and knowledge considered to be true and accurate and is offered for the users' consideration, investigation, and verification; but we do not warrant the results to be achieved. Please read all data sheets, statements, suggestions, or recommendations in conjunction with our conditions of sale, which apply to all goods supplied by us.

DRAWING SCALE:	NOT TO SCALE
EFFECTIVE DATE:	06/23/2020
SUPERCEDES:	03/01/2018