

POLYGUARD PRM MEMBRANE



POLYGUARD POLYFLOW 18 SHEET MOLDED DRAIN - WOVEN MESH FACING UP


12" STRIP OF POLYGUARD
DETAIL TAPE OR POLYGUARD
650 MEMBRANE APPLIED TO
OUTSIDE CORNER PREPARED
WITH POLYGUARD 650 LT LIQUID
ADHESIVE OR POLYGUARD
CALIFORNIA SEALANT AT A
RATE OF 250 - 300 SF/GAL OR
POLYGUARD 650 WB LIQUID
ADHESIVE AT A RATE OF 350 400 SF/GAL

WATERSTOP - BY OTHERS

POLYGUARD DETAIL SEALANT PW

WATERSTOP PER MANUFACTURES RECOMMENDATIONS - BY OTHERS

POLYGUARD UNDERSLAB MEMBRANE FABRIC TOWARD CONCRETE POUR

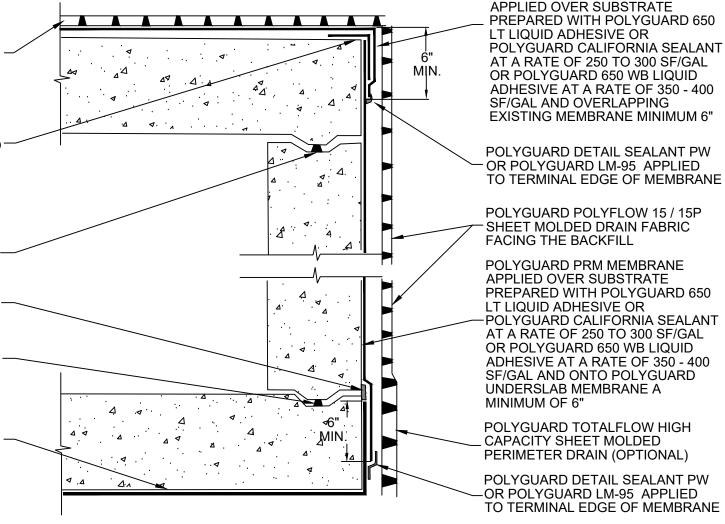



SECTION@ TUNNEL WATERPROOFING DETAIL

Polyguard Products, Inc. P.O. Box 755 - Ennis, TX 75120 Phone: 214-515-5000 Web Site - www.polyguard.com

SPECIAL NOTE: IF ADHESIVE IS REQUIRED FOR SEAMS OR ENDLAPS DO NOT USE POLYGUARD 650 WB LIQUID ADHESIVE ©POLYGUARD PRODUCTS, INC. MATERIAL SEPARATED FOR CLARITY

The information provided is based on data and knowledge considered but true and accurate and is offered for the users' consideration, investigation, and verification, but we do not warrant the results to be obtained. Please read all data sheets, statements, recommendations or suggestions in conjunction with our conditions of sale, which apply to all poods supplied by us

NOT TO SCALE

EFFECTIVE DATE:
10/01/2022

SUPERCEDES: 05/05/2022